

2.2 Device Configuration


NovoDS DS301 offers a range of settings to configure the device based on your requirements. The settings offered by the device are shown and explained below.



Home-Screen Menu

2.2.1 Playlists

The “**Playlists**” button allows you to select the default playlist to start upon power-up.

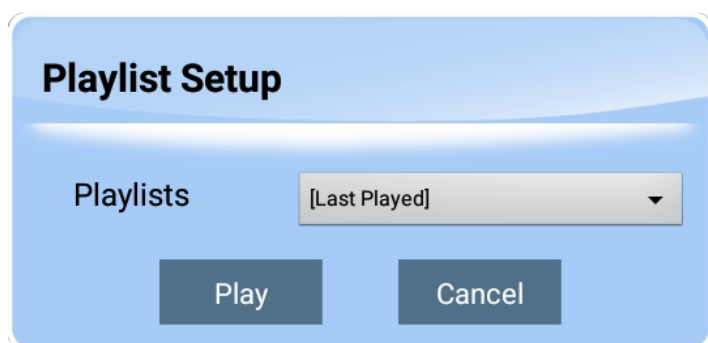


Playlist Setup

2.2.2 Display

The “**Display**” button allows you to configure the followings

- **Resolution:** Set the proper display resolution. It is worth mentioning that unsupported display resolutions will become inactive. For example, if you connect a non-4K monitor to NovoDS, the “4K” resolution will be greyed out, as shown in the figure below.
- **Scaling:** Resize the display output dimension.
- **HDMI-CEC:** Enable/disable HDMI-CEC feature. Once it is enabled, you can use TV remote control to control NovoDS device as well.
- **Orientation:** Set the appropriate orientation of your display.

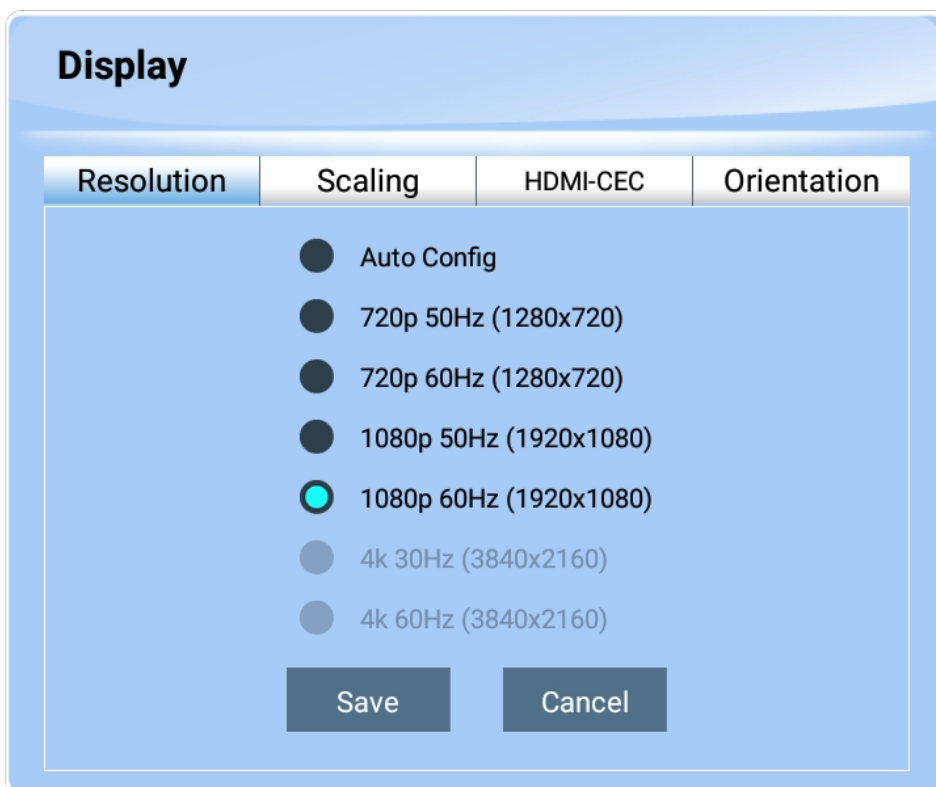


Display Configuration

2.2.3 Settings

There are several actions you can take under button “**Settings**”.

- **“Auto-Play Setup”** – Configure auto-playback after device’s boot-up and upon microSD card insertion.
- **“Settings Protection”** – Lock or unlock device settings with a password.
- **“Firmware Upgrade”** – Check for firmware upgrade from our Internet server.
- **“General Settings”** – Set regional language, date & time, etc.

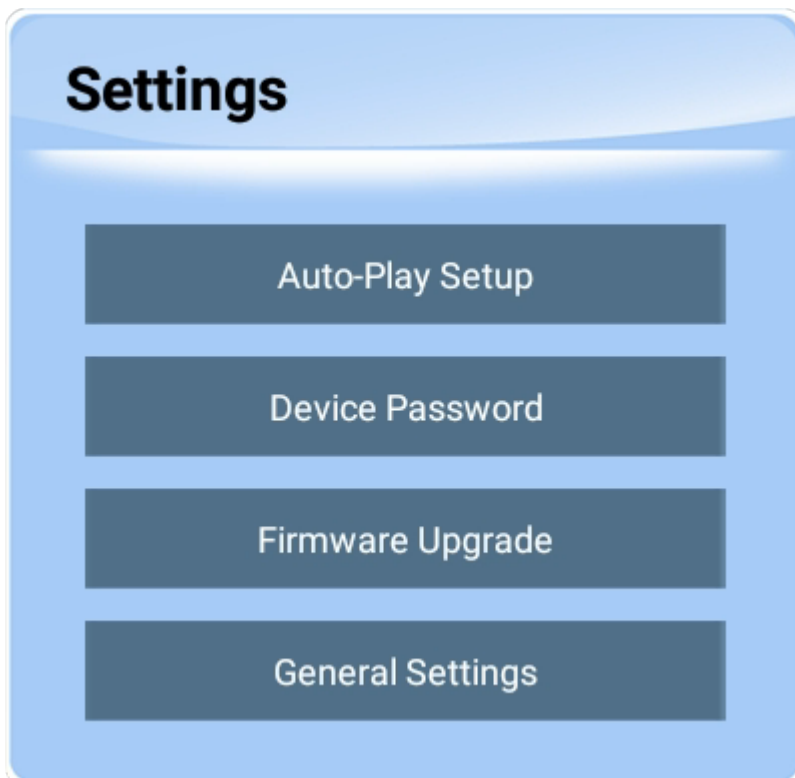

Settings

2.2.4 Restart

Click on **“Restart”** to restart the NovoDS device.

2.2.5 Play Demo

There is a demo playlist available on your NovoDS device, which demonstrates some of the features your NovoDS device can do. Click on button **“Play Demo”** to see it in action in seconds.

