


4.1.1 Sleep Timer

Configuring a Boot up and Shut down Timer


The NovoTouch BK3 has a built-in Google EDLA qualified operating system; therefore, the timer setting needs to be set through the Android setting.

Step1. In the Main page, tap **Settings**.

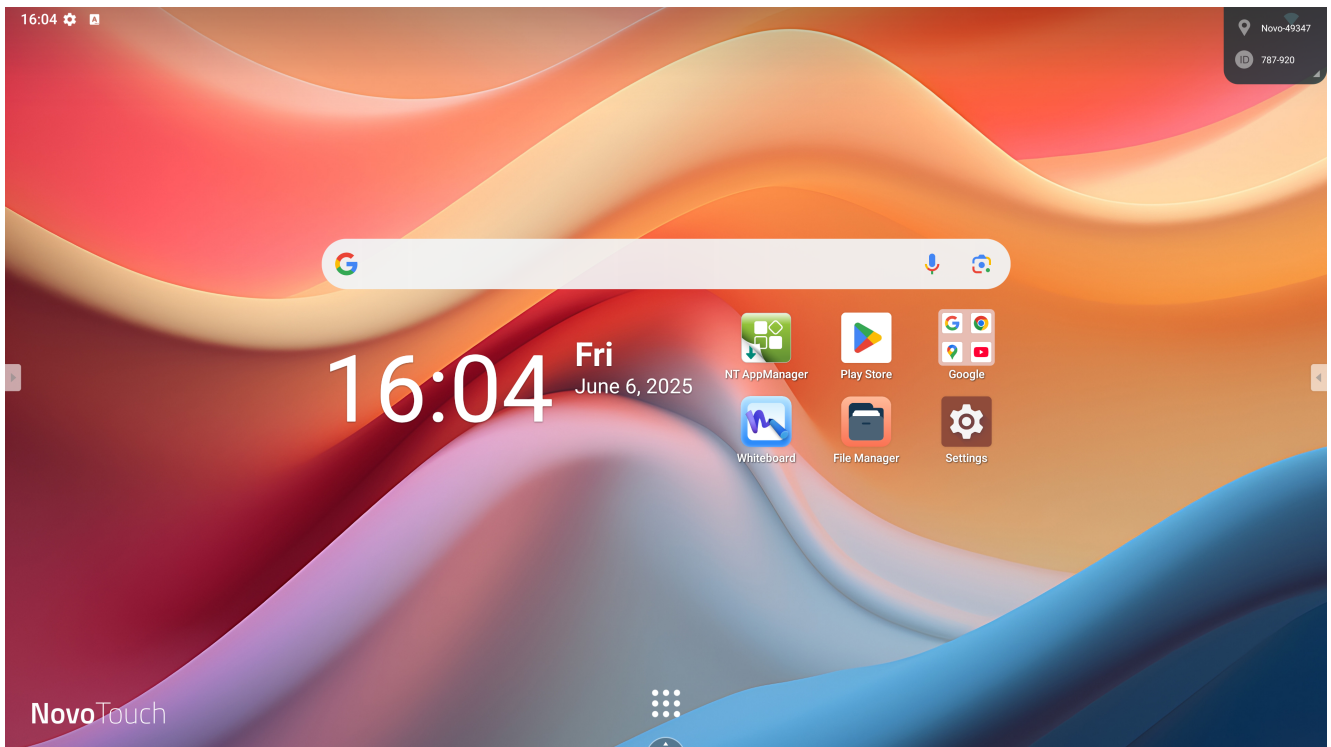

Settings

Step2. In the **Settings** menu, select **Advanced Features**.

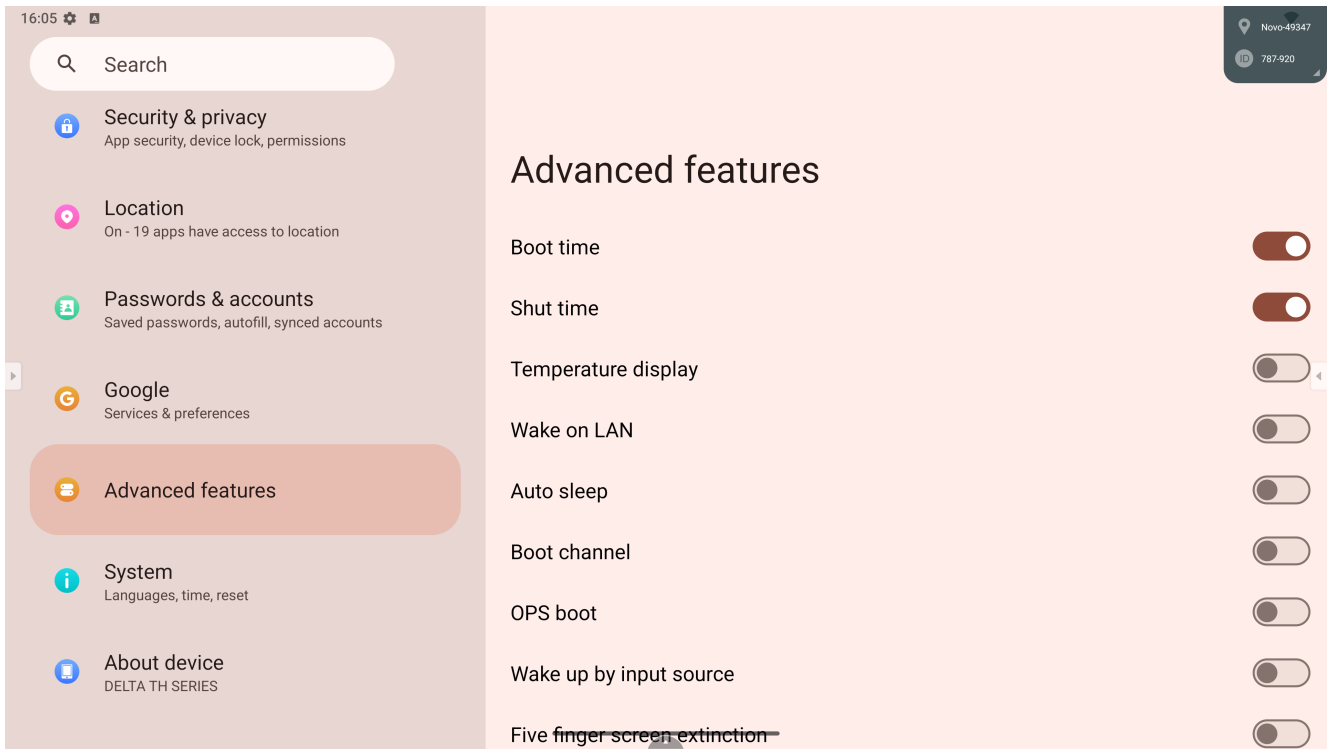


Settings

Step3. The **Sleep Timer** menu will show the following options:

- Do not enter sleep mode
- Enter sleep mode after idle timeout

This item includes the following options to select: **5 minutes** / **10 minutes** / **15 minutes** / **30 minutes** / **1 hour**

- I. After you've selected the option you want, tap **Apply**.
- II. Return to the display's home screen.
- III. Once the home screen has been idle for the designated amount of time, the display will enter sleep mode.

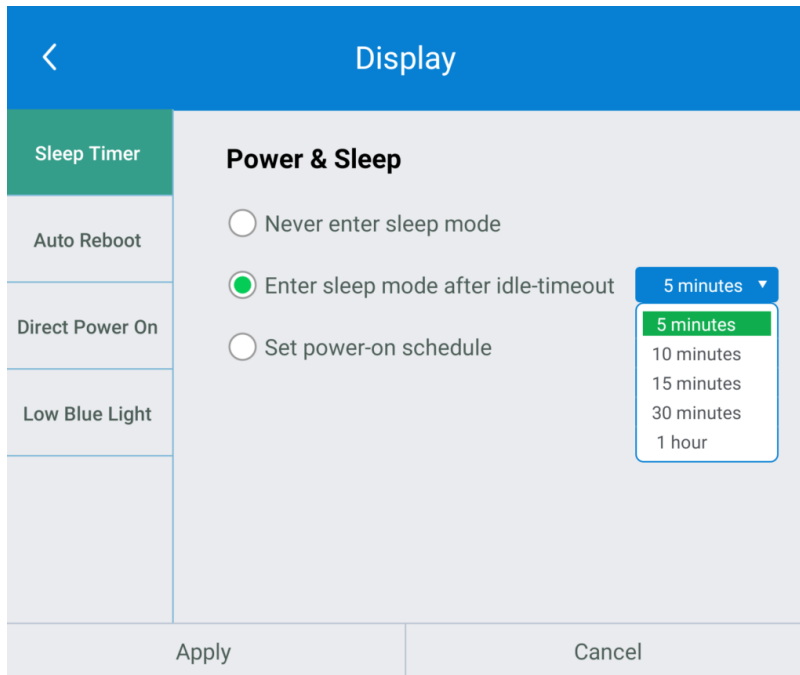


Timer selection


- Set power-on schedule

Allows you to set the days and time period each week when the display will be constantly on.

- After you've selected the days and time period you want, tap **Apply**.
- Return to the display's home screen.
- Once the designated time is past, the display will enter sleep mode.

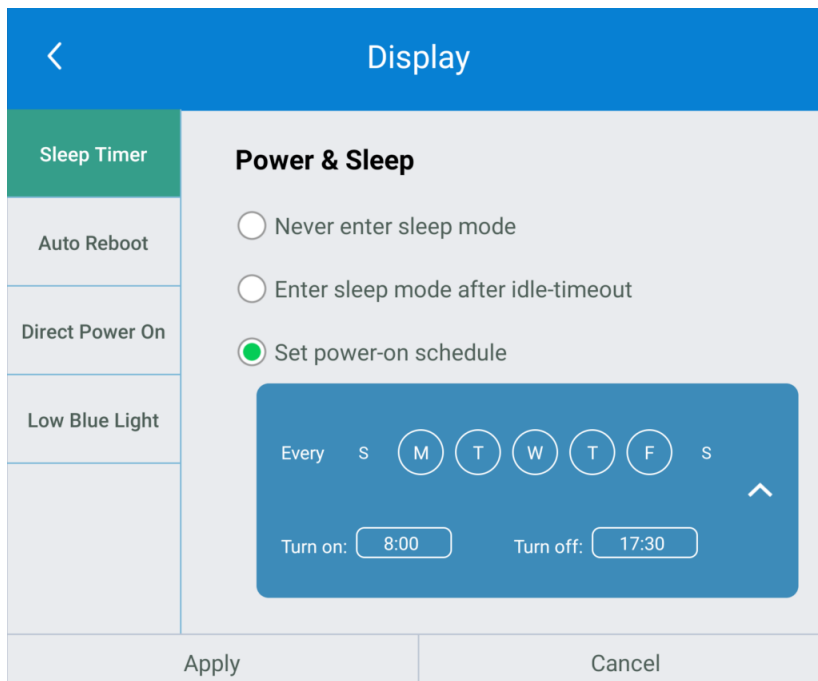

Create a schedule

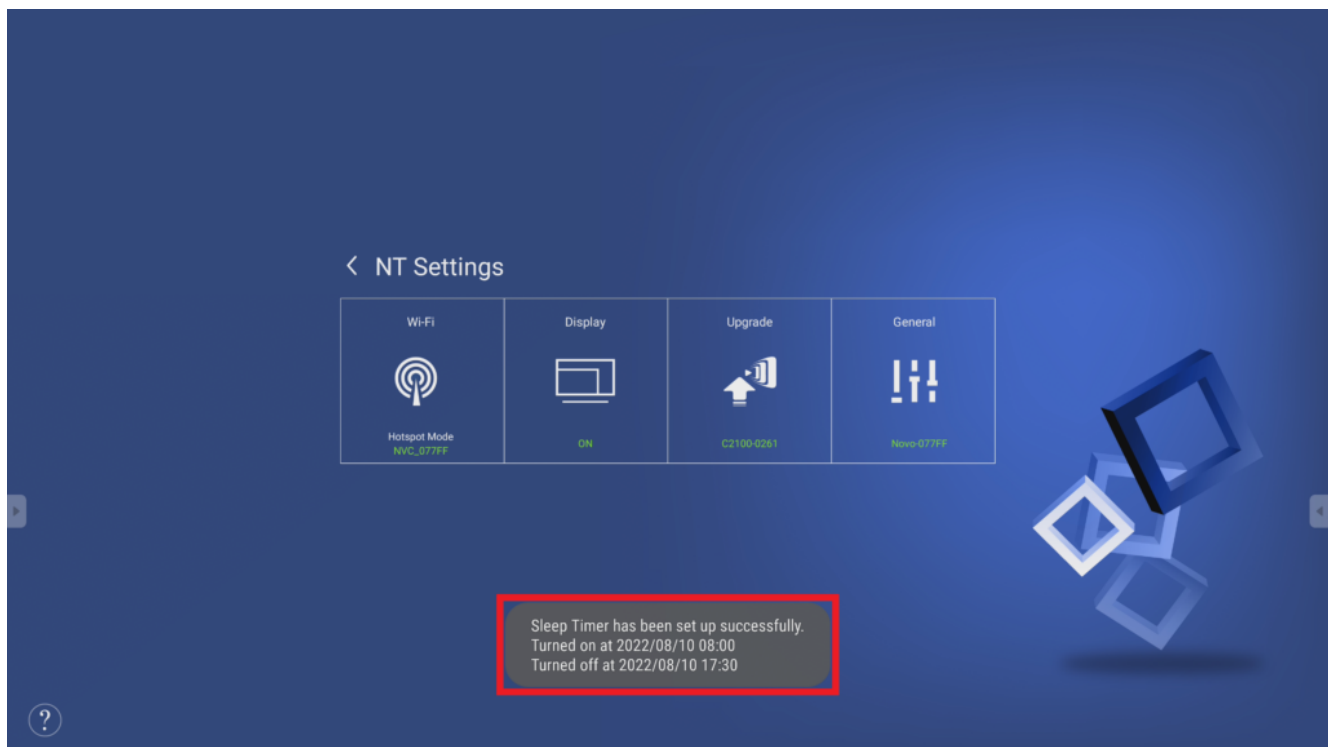

Successfully set up message

